


GRID LOCATION	BOTTOM ELEVATION
2/D	74'-5"7/16

TOTAL QTY.	UNIT QTY.	DIAMETER	TYPE	LENGTH	SITE / WORKSHOP
4		3/4"	A325N_TC	2 1/4"	Site
10		3/4"	A325N_TC	2 1/2"	Site

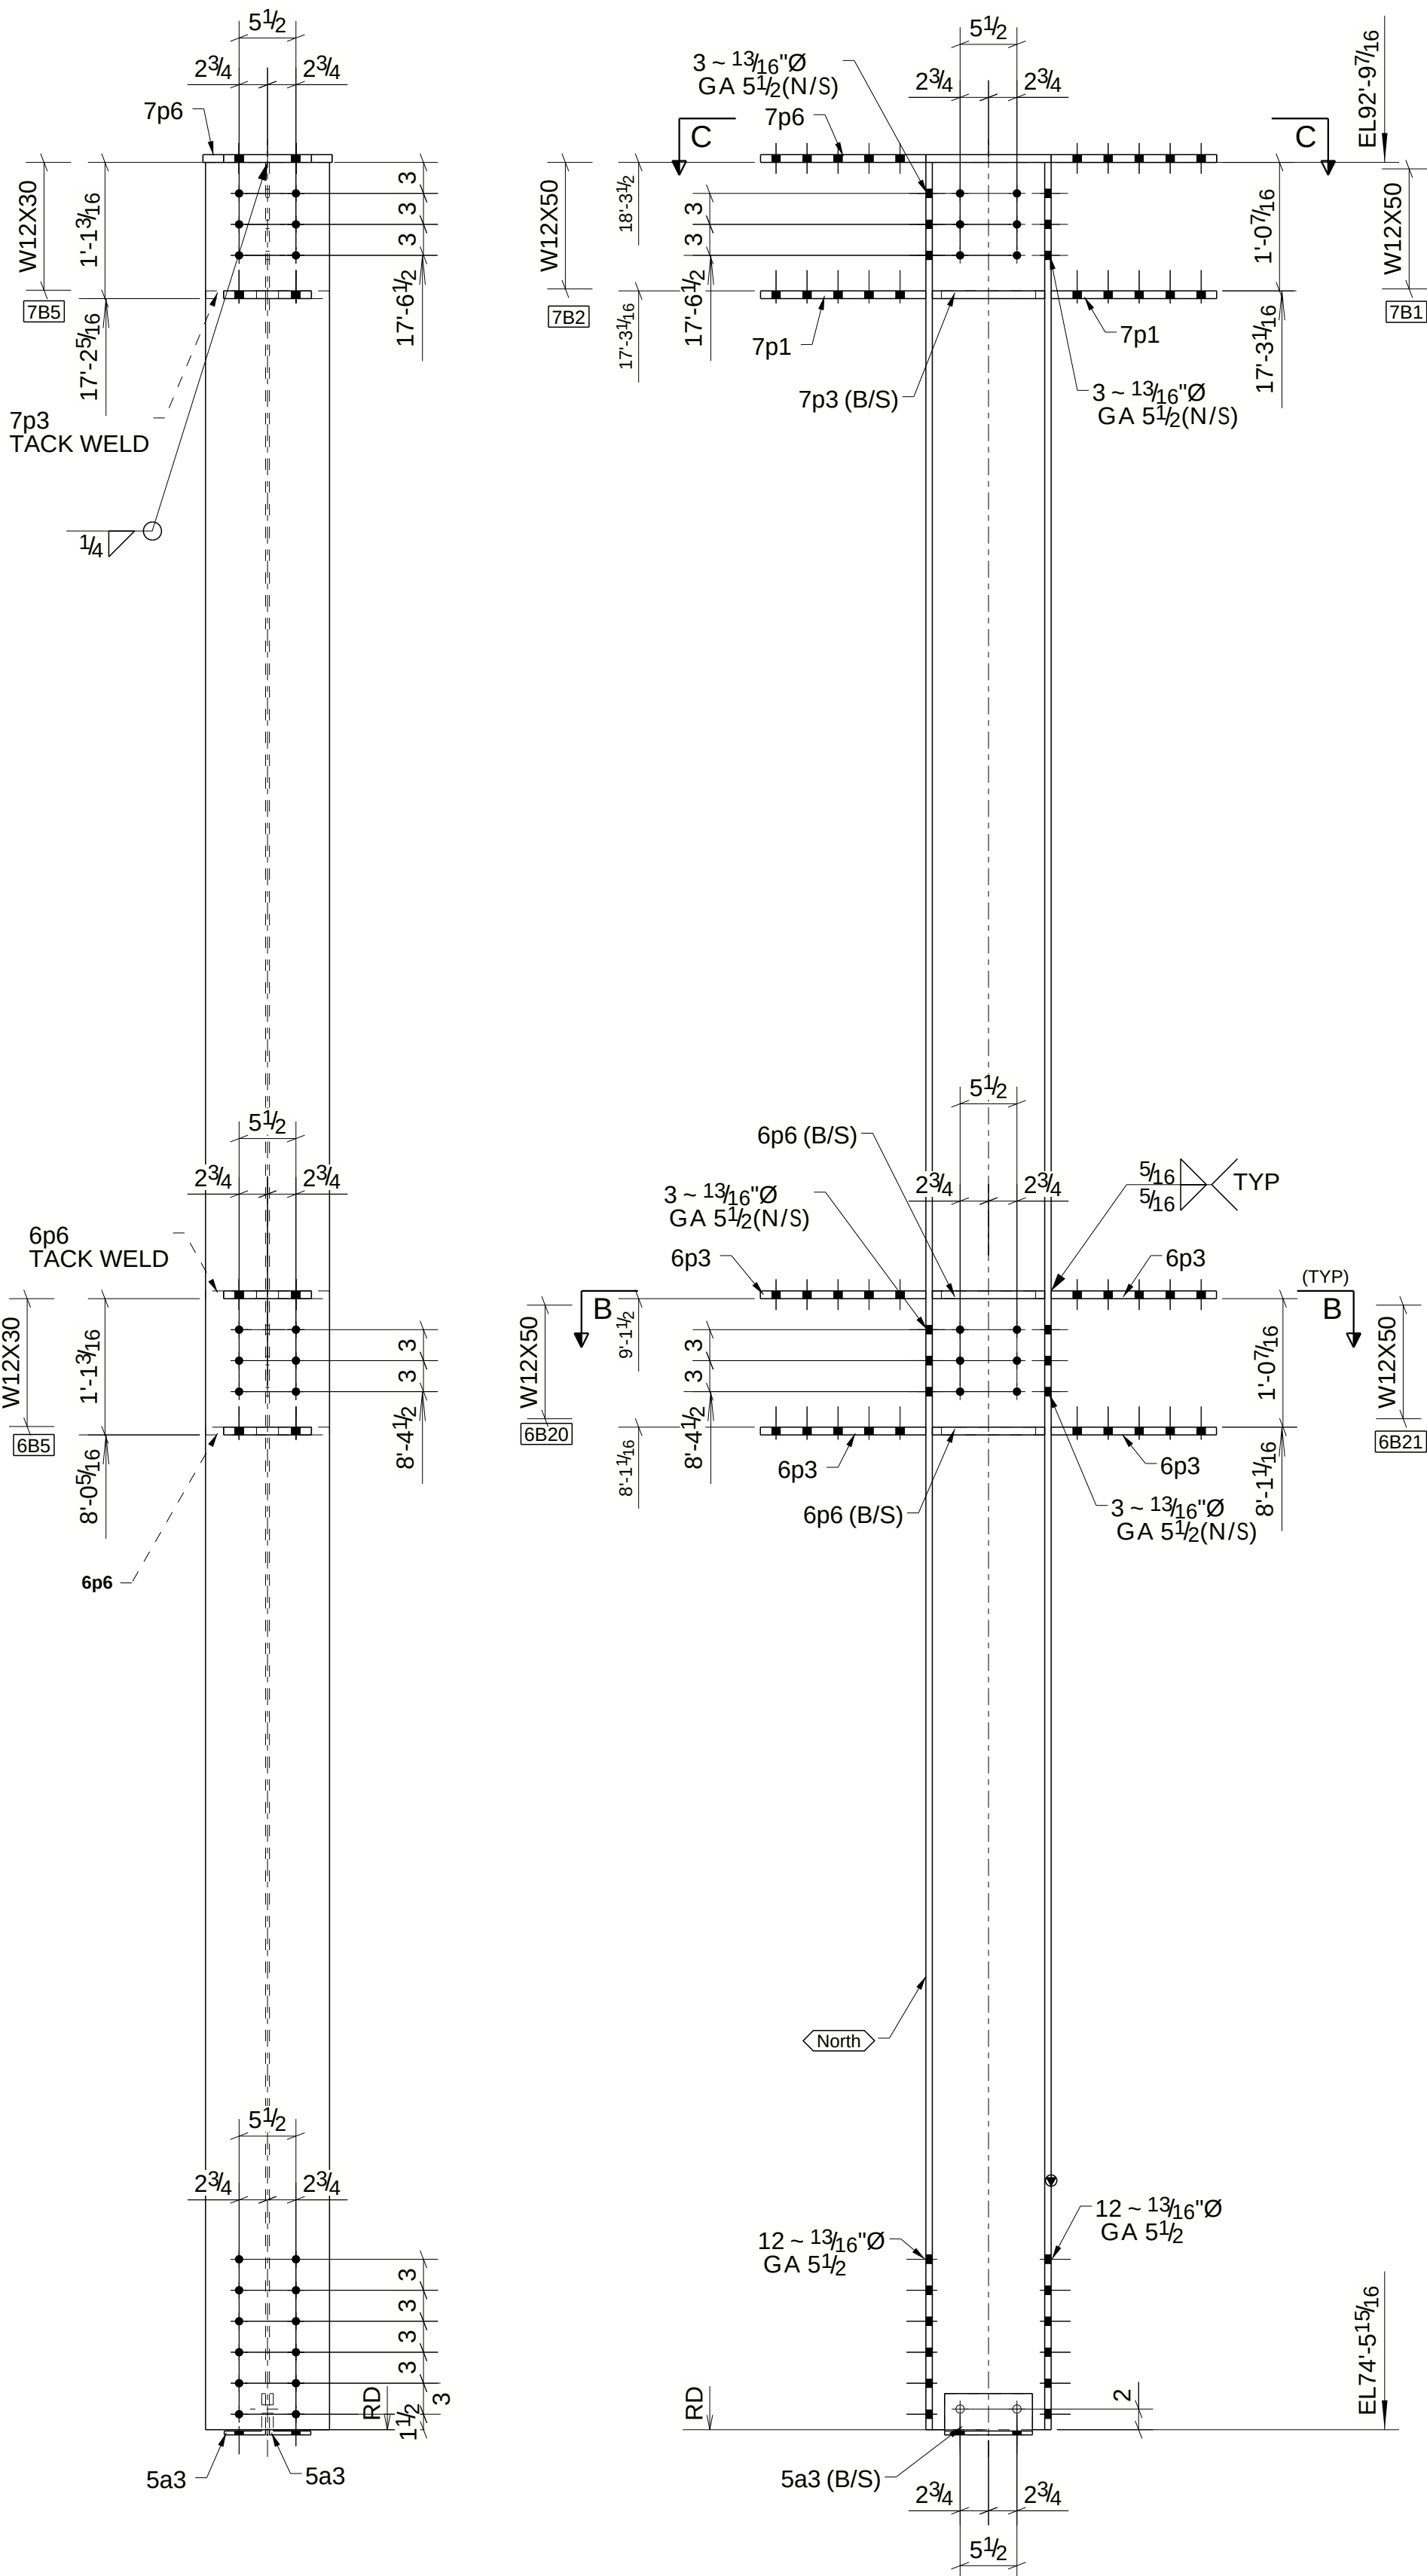

ONE - COLUMN - 5C3

BILL OF MATERIAL								
QTY	ASSEMBLY MARK	PIECE MARK	TYPE	SIZE	LENGTH	WEIGHT	FINISH	GRADE
	5C3			COLUMN				
1			I	W12X65	18'-3 1/2"	1188.9		A992
2		5a3		L4X4X3/8	0'-8 1/2"	13.8		A36
4		6p3		FL3/4"X8 1/2"	1'-4"	115.8		A36
4		6p6		PL3/4"X5 13/16"	0'-10 7/8"	53.1		A36
2		7p1		FL3/4"X8 1/2"	1'-4"	57.9		A36
Tie anchors		7p3		PL3/4"X5 13/16"	0'-10 7/8"	26.6		A36
	1	7p6		PL3/4"X12 1/2"	3'-8 1/8"	103.7		A36
	2	SHOP BOLTS		3/4"Ø A325N_TC BOLT	0'-2 1/4"			
	TOTAL					1559.8		

Tells structures